



ABN 71 006 284 037

# ZOCPAVE

*The designer label in paving...*



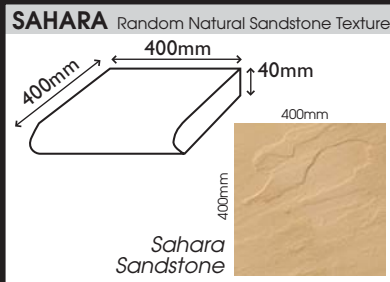
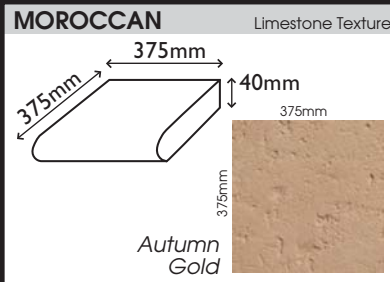
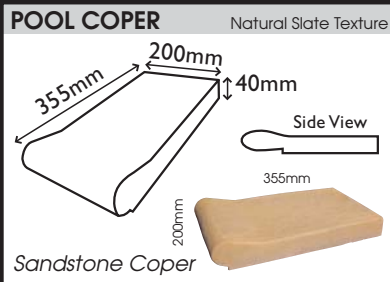
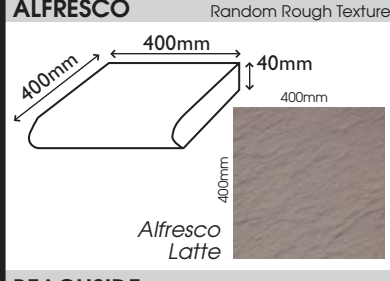
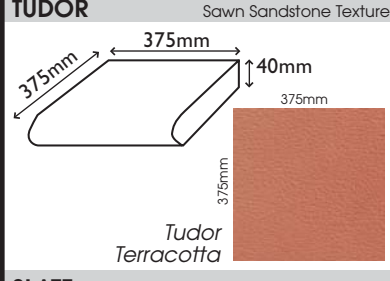
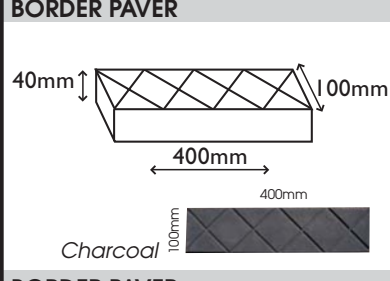
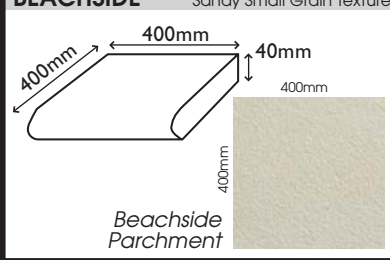
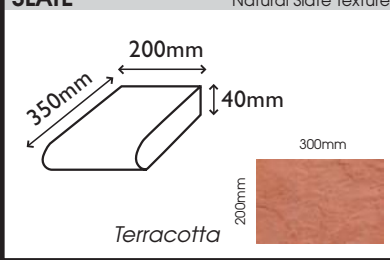
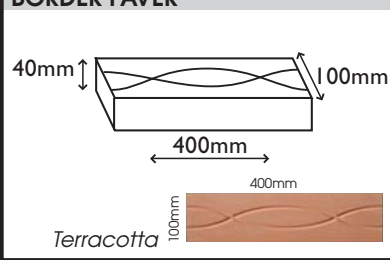
### ZOCPAVE PAVING IS IDEAL FOR

Pools • Driveways • Patios & Pergolas • Courtyards • BBQ & Entertainment Areas  
Indoor Living • Games Rooms • Domestic & Commercial • **MPA Rating Mid 50's (Strength)**

- Slip Resistant
- Pool - Salt Resistant
- Handmade
- Commercial & Domestic Range
- Driveway Safe
- Internal & External Use
- Coloured all the way through

Sahara Pattern

Alfresco Pattern

BULLNOSE PAVER	BULLNOSE PAVER	COPER/BORDER PAVER
<b>SAHARA</b> Random Natural Sandstone Texture 	<b>MOROCCAN</b> Limestone Texture 	<b>POOL COPER</b> Natural Slate Texture 
<b>ALFRESCO</b> Random Rough Texture 	<b>TUDOR</b> Sawn Sandstone Texture 	<b>BORDER PAVER</b> 
<b>BEACHSIDE</b> Sandy Small Grain Texture 	<b>SLATE</b> Natural Slate Texture 	<b>BORDER PAVER</b> 

*The Zocpave Wet Cast Range offers the natural beauty of stone in a palette of colours, textures and finishes. With an emphasis on function, practicality and ease of use. This technically advanced high strength concrete mix can reproduce a stone texture with structural capabilities, making it ideal for pool surrounds, courtyards, terraces, paths and driveways, Available in earthy, natural colours to complement your landscaping and living environment, Zocpave Wet Cast products will also enhance a range of architectural styles, making them the perfect choice for modern living.*

- The use of SEALER is recommended to assist in maintenance, cleanliness, stain prevention and the transmission of water borne salts (efflorescence).
- Although every effort is made to ensure consistency of paver colour, variations between product batches can occur. Draw from all pallets to blend the pavers when laying.
- During the laying of pavers, excess grout, cement or any other material should be cleaned as you progress. Use only clean water - DO NOT USE ACID. Pavers and tiles are cement products and will be severely damaged by acid.
- 40mm Pavers must be laid over a sub base suitable for your particular site so as the pavers do not subside. All edge pavers must be contained so as to prevent the bedding material from washing out (Allowable variance: 3mm + or -).
- 20 mm Tiles must be laid on concrete. Tiles must be fully bedded in (glued and grouted as a tile).

Paver dimensions given are nominal and subject to slight variation, within normal handmade manufacturing tolerances. All products are slip, abrasion and salt resistant and driveway safe, and meet all current Australian / New Zealand Standards.

**Please note that the colours in this brochure should only be used as a guide.**

Due to the fact that Zocpave Pty Ltd or any of it's agents, employees etc. have no control over the use, laying or coating of their products, cannot and will not accept any responsibility for any injury to any person or property that may occur or arise out of the use of their products.